

PALERMO 600 **0780** sku 1084007

astro





PRODUCT SPECIFICATION

GENERAL

| FINISH: | Polished Chrome | CABLE LENGTH: | Not Applicable |
|---------------------------|--------------------------|----------------------------|---|
| MAIN MATERIAL: | Metal - Aluminium | GROSS WEIGHT: | 1.2 (kg) |
| DIMENSIONS: | H: 600mm W: 40mm D: 60mm | CLASS: | CE (Class II) |
| INSTALLATION ORIENTATION: | Wall Mount | IP RATING: | IP44 |
| CUT OUT HOLE: | Not Applicable | BATHROOM ZONE: | Zone 2, 3 |
| RECESS DEPTH: | Not Applicable | VOLTAGE: | Mains 230V |
| FIRE RATING: | Not Applicable | PRODUCT F MARK: | Suitable for mounting on flammable materia |
| LAMP | | | |
| LIGHT SOURCE: | Т5 | MACADAM ELIPSE: | Not Applicable |
| MAXIMUM WATTAGE: | 14W | UGR: | 1.1 (UGR) |
| MAXIMUM LAMP LENGTH: | Not Applicable | BEAM ANGLE: | Not Applicable |
| LAMP INCLUDED? | Yes | TILT ADJUSTMENT ANGLE: | Not Applicable |
| LUMINOUS FLUX: | 322.9 (lm) | ROTATION ADJUSTMENT ANGLE: | Not Applicable |
| COLOUR TEMP: | 2700K | AVERAGE LIFESPAN: | 12,000 (Hrs) |
| CRI: | To Be Advised | L70: | Not Applicable |
| R9: | 1.1 | | |
| ELECTRICAL | | | |
| SWITCHED: | No | SUPPLY FREQUENCY: | 50/60 (Hz) |
| DIMMABLE: | No | DRIVER / BALLAST VOLTAGE: | 220-240 (V) |
| DIMMING METHOD: | Not Applicable | DRIVER AVERAGE LIFESPAN: | Not Applicable |
| DRIVER OUTPUT CURRENT: | Not Applicable | EFFICACY: | 20.96 (lm/W) |
| DRIVER OUTPUT VOLTAGE: | Not Applicable | DRIVER/BALLAST INCLUDED? | Yes (Integral) |
| | | | |

ADDITIONAL INFORMATION




This product is not suitable for use with a PIR motion detector.



BOX QUANTITY X8

Œ

PRODUCT ELEVATIONS

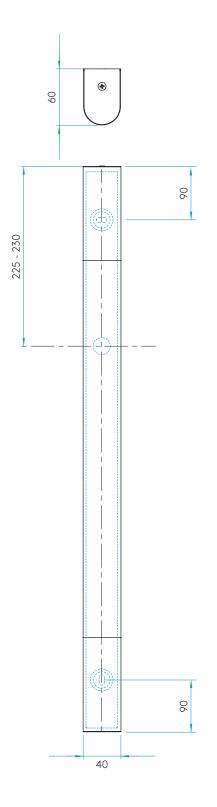

Astro Lighting Ltd. G2 River Way, Harlow, CM20 2DP, Great Britain T: +44 (0) 1279 427001 F: +44 (0) 1279 427002 sales@astrolighting.co.uk www.astrolighting.co.uk